

# Hydracrop 80

Where production requires twin operator machines, higher speeds or greater capacity, **GEKA** provides the solution with the **HYDRACROP** range with five working stations: punching, notching, shearing of flat bars, angles and Øand Ø bars.

HYDRACROP 80	
SHEAR FOR FLAT BARS	
Shearing capacity	18"x5/8" / 12"x3/4"
Working height	33 1/2"
SHEAR FOR SECTION IRON	
Shearing capacity	150 Ton
Lat 90 °	5"x5"x1/2"
L at 45°	3"x3"x5/16
SHEAR FOR BARS	
Round bar Ø	13/4"
Square bar 🛛	13/4"
WITH SPECIAL BLADES	
UPN Profiles	5"
IPN Profiles	5″
NOTCHING	
Plate thickness	15/32"
Depth	31/2"
Width	2"
PUNCHING	
Punching power	88 Ton
Maximum capacity with quick change	Ø11/2"x 9/16"
and die with gooseneck die holder	Ø7/8"x7/8"





### Punching station

The punching station is fitted with an independent cylinder that creates a large, flexible, universal workstation easily adaptable for mounting special tools and "die sets".



Cylinder support



Split double acting cylinder



Limit switches for punch travel setting

Generous travel for bending, deep-drawing, forming jobs etc



Adjustable generous non-turning guiding

Additional guiding for damping of offset forces and protection of hydraulic seals

Spindle for fitting of special tools

Quick punch change

Adjustable material stripper

Table with millimetre scales, included in production package

Adjustable measuring stop up to 500 mm

Gooseneck die-holder for punching channel and section

Adjustable bolster locking device X axis



Adjustable bolster locking device Y axisa

Fixing bolt at base of gooseneck

### L cutting angle

Fully aware of the importance of distortion free shearing, GEKA has designed a patented system of a floating upper blade that travels along a rectilinear line and is able to shear angles without any deformation and loss of material (single cut); All GEKA Hydracrop models ensure that distortion problems caused by the conventional radial system are now a problem of the past.




Adjustable Support

Blade gap adjustment screws



Upper shear blade without deformation




Safety protection

### Shearing for flat bars


The excellent stability of the monoblock blade-holder, which is controlled at the each end, makes it possible to mount a long upper blade with a proven geometry to obtain optimum shearing quality. The radial system allows a generous cutting capacity as a result of the force multiplier effect.

- 1. Lower blade
- 2. Upper blade with special geometry
- 3. Clearance control between shear blades
- 4. Supplement shearing angle control of upper blade, for shearing without deformation.
- 5. Adjustable guides 45° right and left.
- 6. Flat plate/bar shearing table.
- 7. Slotted guide positioning with coverage of the entire blade length
- 8. Guide fixing screw
- 9. Clearance control of blade-holder



## Hydracrop 80

#### **Notching station**

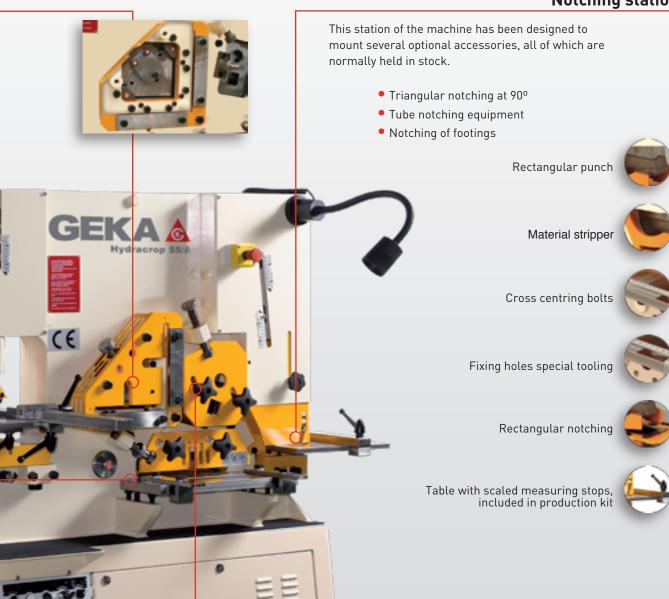

The

### Cutting of $\varnothing$ and $\square$ bars

GEKA HYDRACROP machines are fitted as standard with blades for cutting Øand Ø bars. Furthermore, this station has been designed bearing in mind the shearing of other sections such as 凵, Ҭ, Z for which a large stock of blades is available.




Adjusting bolt and height setting of the guide



Blade holding flanges







- World leader in punching and shearing solutions
- Worldwide distribution network
- Proven quality, design and craftsmanship
- Continuous innovation
- Complete after sales service
- Great versatility that includes the highest range in accessories and optional equipments in the market
- The only machine fully produced and manufactured in the European Union
- All GEKA machines are special order. GEKA is the only ironworker that you can customize to fit your needs

### www.geka.es

Distribuidor: